

FBHA S Series

Chip Ferrite Bead High Current Type Size 1206




FEATURES

- Noise reduction solution for power line.
- Compared to the FBA series, has low direct current resistance for compatibility with large currents, optimal for low power consumption. Various frequency characteristics with 2 materials of different features for countermeasures against everything from general signals to high-speed signals.
- Performs well even in signal lines where low direct current resistance is required.
- AEC-Q200 qualified
- Operating temperature: -55 to +150 °C (including self-temperature rise)
- Quantity: 3000 pcs


APPLICATION

- Power line filter for body controls, and car multimedia etc.

Dimensions: [mm]

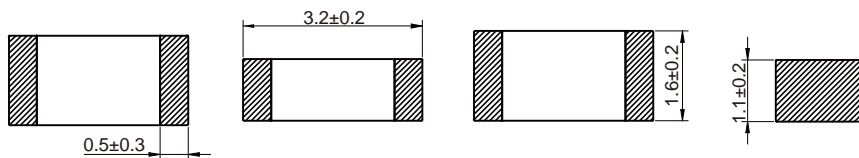

Land Pattern: [mm]











Electrical Properties:

	(Ω)	$\pm 25\%$	(Ω)	(mA)
FBHA1206S-300-113R	30	$\pm 25\%$	0.0025	11000
FBHA1206S-500-123R	50	$\pm 25\%$	0.0025	12000
FBHA1206S-121-602R	120	$\pm 25\%$	0.0090	6000
FBHA1206S-271-452R	270	$\pm 25\%$	0.0160	4500
FBHA1206S-471-402R	470	$\pm 25\%$	0.0200	4000
FBHA1206S-601-292R	600	$\pm 25\%$	0.0380	2900
FBHA1206S-801-252R	800	$\pm 25\%$	0.0500	2500
FBHA1206S-102-202R	1000	$\pm 25\%$	0.0750	2000

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

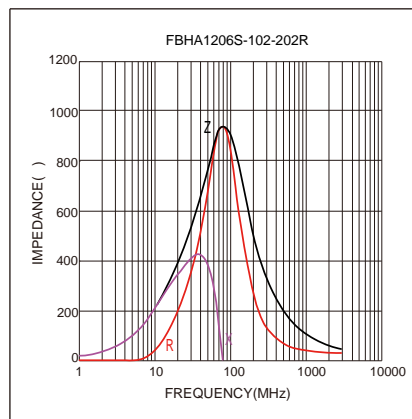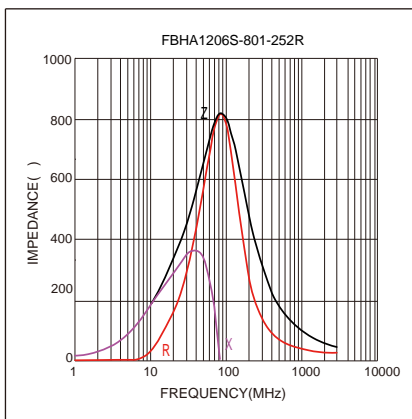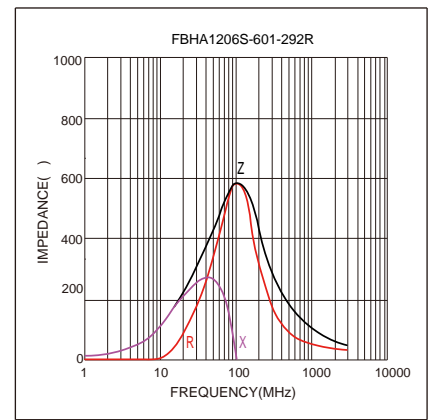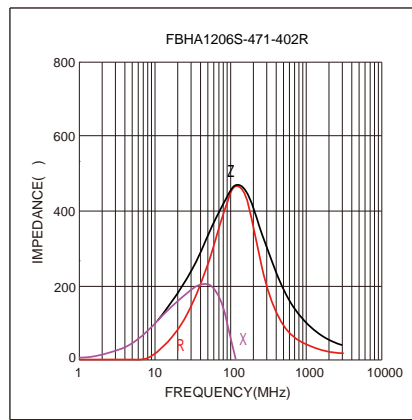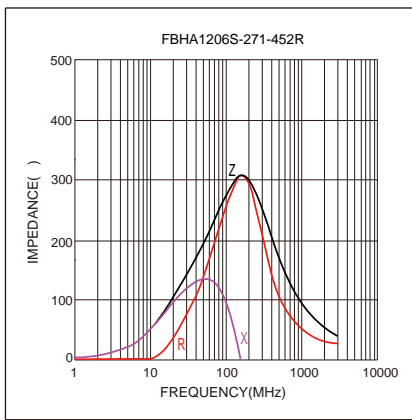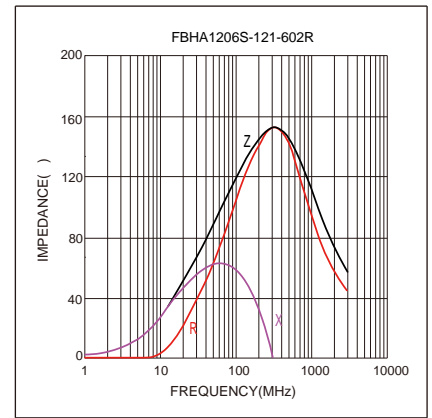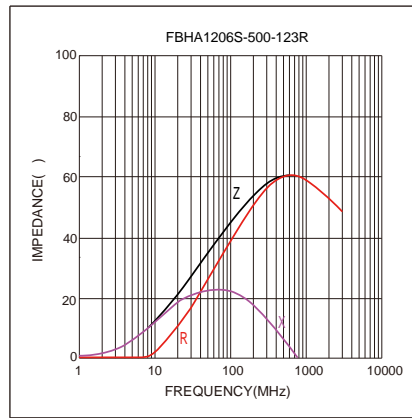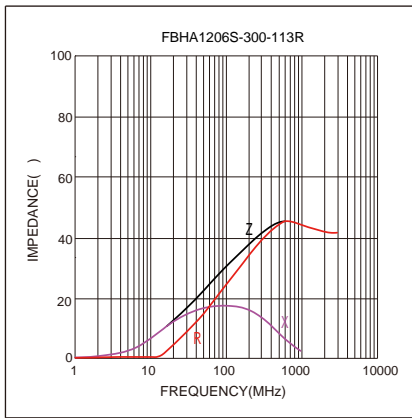

Soldering Reflow:


Packaging Information:

Tape Dimension:




Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
FBHA1206S	1.75±0.1	3.35±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	1.25±0.1	1.75±0.1	0.23±0.05

Peel force of top cover tape:

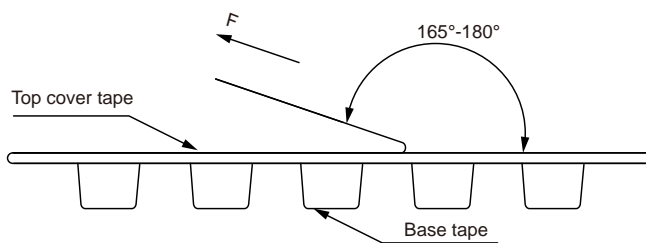

The peel force of top cover tape shall be between 0.14 to 0.58

Reel Dimension: [mm]

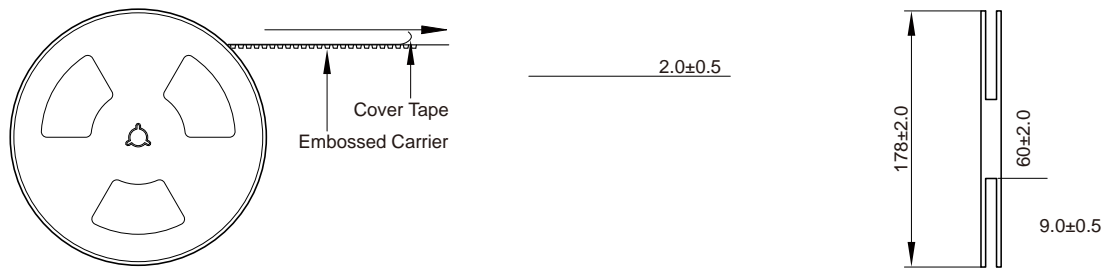

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C , humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C .
-
-