


MDA Series


FEATURES

- Shielded construction
-
-
- Ultra low buzz noise, due to composite construction.
-
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 200PCS



APPLICATION










- Headlamps, tail lamps and interior lighting
-
- Doors, window lift and seat control
-
-
- In-Vehicle Infotainment and navigation






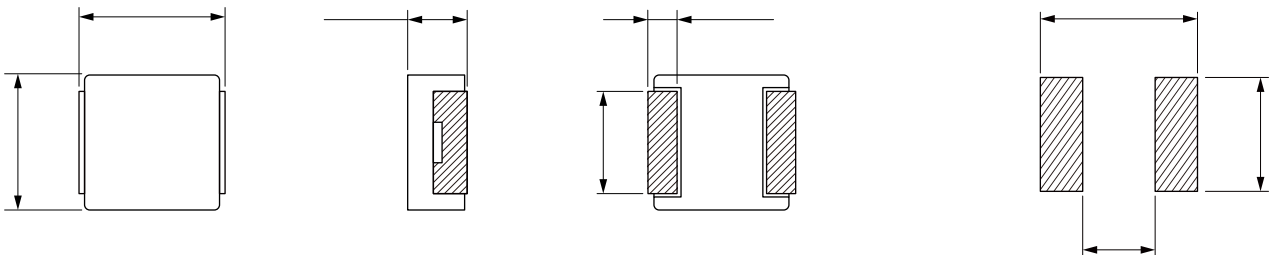



Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)

Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (m Ω)	DC Resistance Max. (m Ω)


△

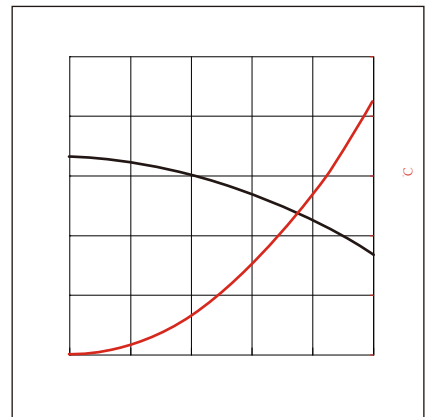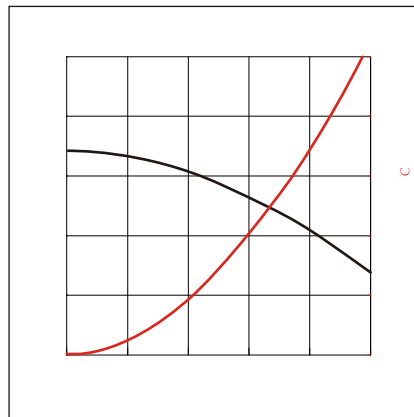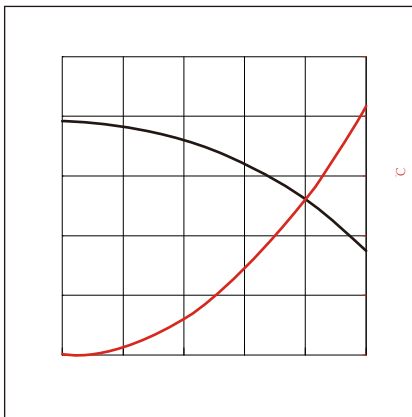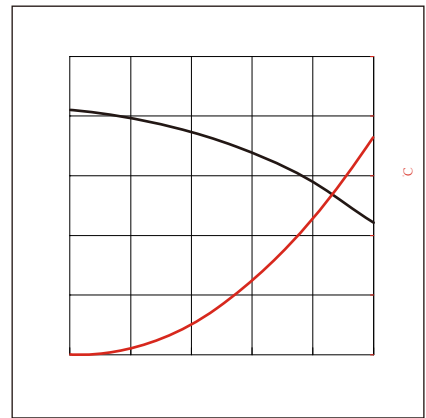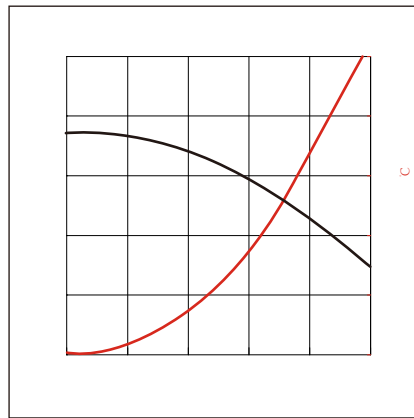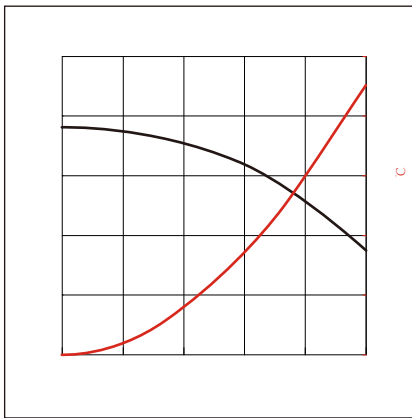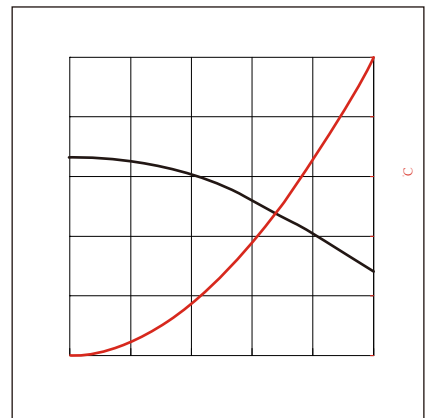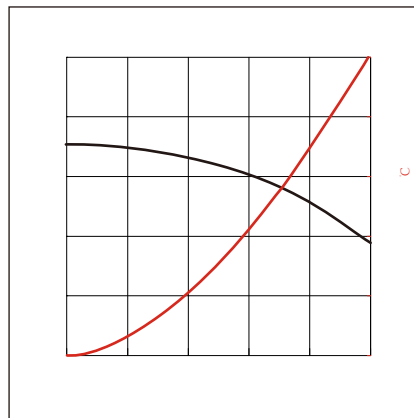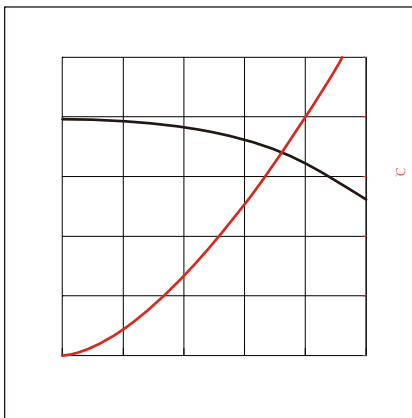

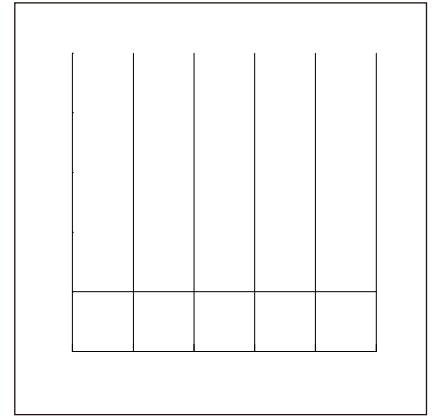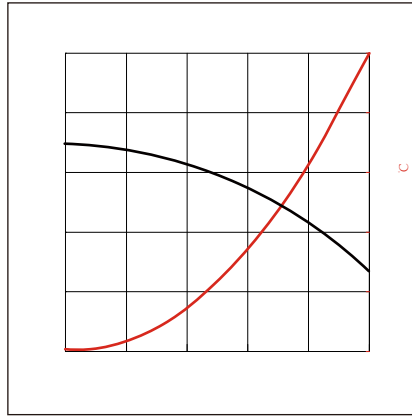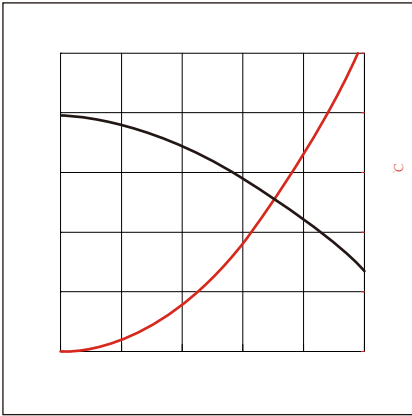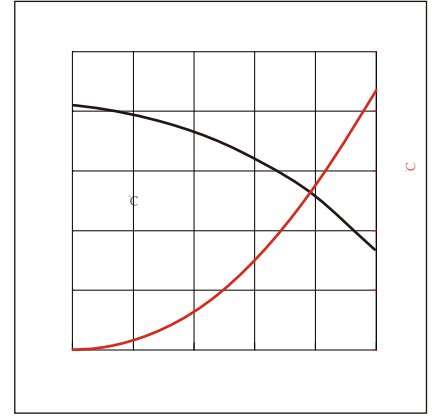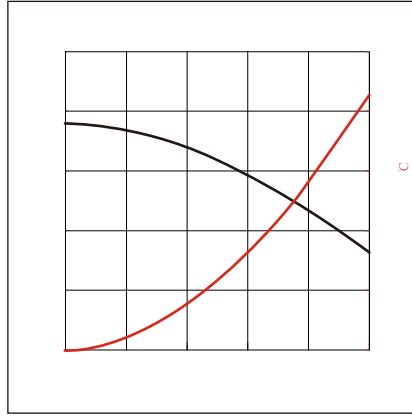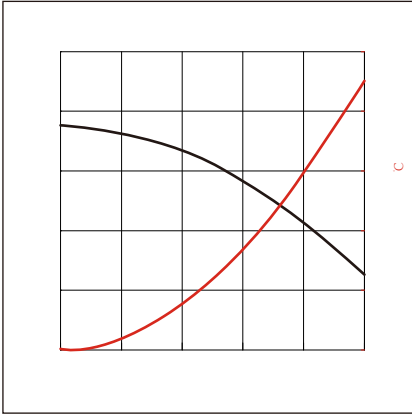


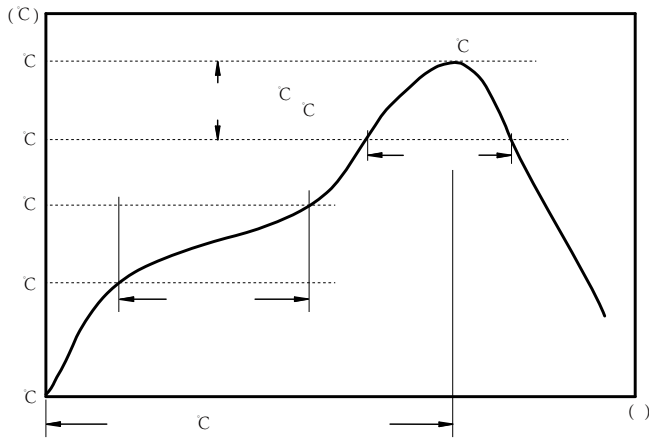

:

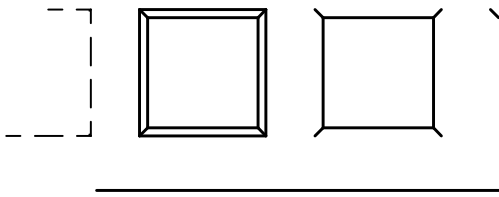





MDA1870	17.5± 0.1	18.1± 0.1	1.5± 0.1	4.0± 0.1	24.0± 0.1	32.0± 0.3	7.3± 0.1	1.75± 0.1	0.50± 0.05
---------	-----------	-----------	----------	----------	-----------	-----------	----------	-----------	------------

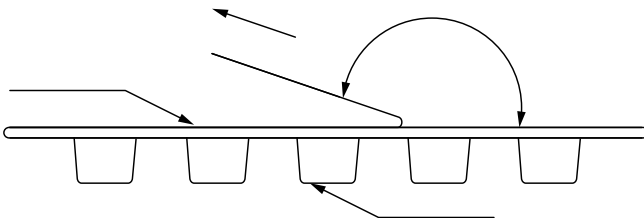


The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	KH+Printing Inductance+period)
---------	--------------------------------


:

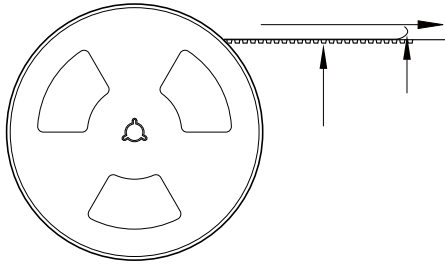

200 Pcs/Reel



2 Reel /Inner box(400 Pcs)



2 Inner box/Carton box(800 Pcs)

:

-
-
-
-
-
-
-
-
-