

MDCA Series

SMD Power Inductor

Size 7050




FEATURES

- Shielded construction.
- Capable of corresponding high frequency.
- Low loss realized with low DCR.
- High performance (Isat) realized by Carbonyl Powder.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +125 °C(including self-temperature rise)
- Quantity: 800pcs


APPLICATION

- Headlamps, tail lamps and interior lighting
-
- Doors, window lift and seat control
-
-
- In-Vehicle Infotainment and navigation

Dimensions: [mm]

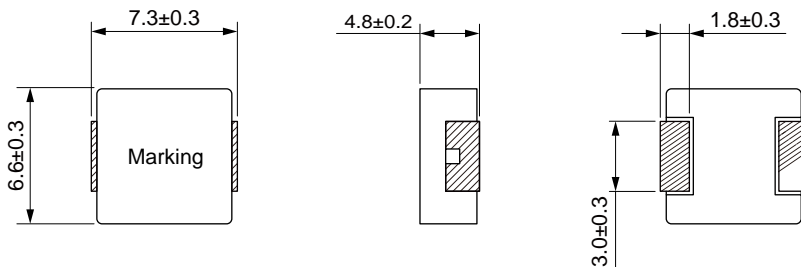




Land Pattern: [mm]



Electrical Properties:

	(μ H)			Saturation	(m Ω)	(m Ω)
MDCA7050-R33M	0.33		25.0	32.0	2.5	3.0
MDCA7050-R47M	0.47		22.0	30.0	3.5	3.9
MDCA7050-R56M	0.56		20.0	27.0	3.6	4.2
MDCA7050-R68M	0.68		18.0	24.0	4.0	4.5
MDCA7050-R82M	0.82		16.5	22.0	4.6	4.9
MDCA7050-1R0M	1.00		15.0	20.0	6.1	6.5
MDCA7050-1R5M	1.50		12.0	16.5	8.6	9.0
MDCA7050-2R2M	2.20		10.0	14.0	11.2	12.0
MDCA7050-3R3M	3.30		8.0	12.0	19.0	20.9
MDCA7050-4R7M	4.70		6.5	10.0	28.0	30.8
MDCA7050-5R6M	5.60		6.0	9.0	43.5	49.0
MDCA7050-6R8M	6.80		5.5	8.5	46.0	51.5
MDCA7050-8R2M	8.20		5.0	8.0	56.0	63.0
MDCA7050-100M	10.0		4.0	7.5	60.0	69.0

	(μH)				($\text{m}\Omega$)	($\text{m}\Omega$)
MDCA7050-150M			3.5	6.0	81	
MDCA7050-220M			2.5	5.5		
MDCA7050-330M			2.0	3.5		

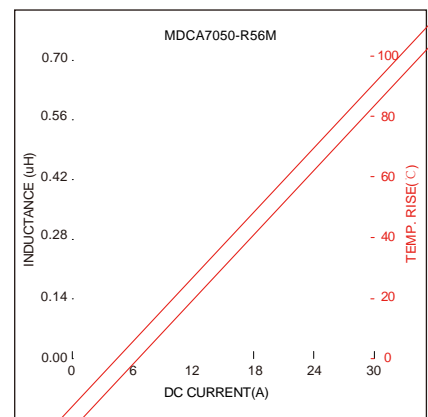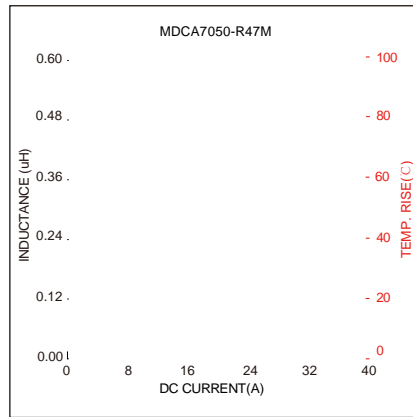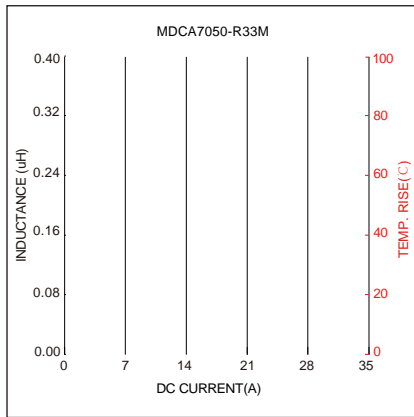

0 6 12 18 24 30

