

SCM Series

3225








FEATURES

-
-
- -40 +125°C (-)
-

APPLICATIONS

- 2.0 , ,
-
-
-

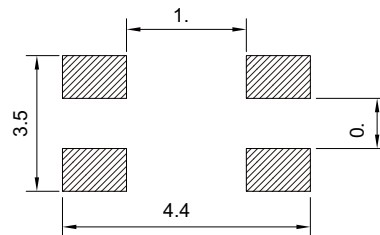

Part No	Impedance @ 100 MHz	Tolerance	DC Resistance Max.	Rated Current Max.	Rated Volt Max.	Withstand Volt Max.	IR Min.

□□ 5-102-045 25.23 5 440 5.- 442.240 3 1 □ 5

()